

TN CLASS 12

Magnetism & magnetic effects Of current

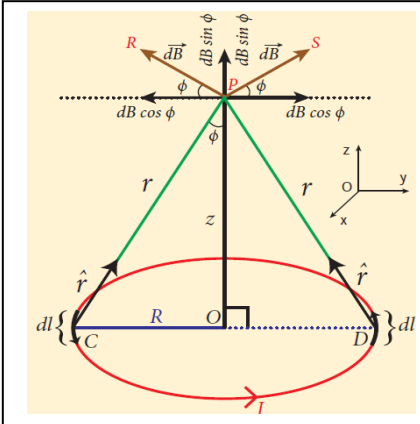
Formulae sheet!

PRIT-EDUCATION

SS. PRITHVI

FORMULAE	EXPLANATION OF THE TERMS INVOLVED	SI UNIT
ANGLE OF DIP $\tan I = \frac{B_h}{B_v}$	B_H =Horizontal component of magnetic field B_V =Vertical component of magnetic field tan I =angle of dip	Magnetic field $B = \text{Tesla (T)}$ $1 \text{ GAUSS} = 10^{-4} \text{ TESLA}$
MAGNETIC DIPOLE MOMENT $\vec{p}_m = q_m \vec{d}$	p_m = magnetic dipole moment q_m = pole strength of the magnetic pole d = distance between south pole to north pole = $2l$	Ampere per metre square Am^2
MAGNETIC FIELD $\vec{B} = \frac{1}{q_m} \vec{F}$	B =magnetic field q_m =pole strength F = force experienced by the bar magnet	$\text{NA}^{-1}\text{m}^{-1}$
RATIO OF MAGNETIC LENGTH AND GEOMETRICAL LENGTH $\frac{\text{Magnetic length}}{\text{Geometrical length}} = \frac{5}{6} = 0.833$	$\frac{\text{Magnetic length}}{\text{Geometrical length}} = \frac{5}{6} = 0.833$	no unit
MAGNETIC FLUX I) FOR UNIFORM FIELD $\Phi_B = \vec{B} \cdot \vec{A} = BA \cos \theta = B_{\perp} A$	ϕ_B = magnetic flux B =magnetic field A =area vector ; θ = angle between ρB and A	si:weber (Wb) cgs:Maxwell
II) FOR NON UNIFORM FIELD $\Phi_B = \int \vec{B} \cdot d\vec{A}$	$\Phi_B = \int \vec{B} \cdot d\vec{A}$	$1 \text{ weber} = 10^8 \text{ maxwell}$
COULOMB'S INVERSE SQUARE LAW OF MAGNETISM $F = k \frac{q_{m_A} q_{m_B}}{r^2}$	F = force between two magnetic poles r = distance between two magnetic poles $k = \frac{\mu_0}{4\pi} \approx 10^{-7} \text{ H m}^{-1}$; μ_0 = absolute permeability of free space ; q_m =pole strength	force: newton (N) k: Henry per metre Hm^{-1}
MAGNETIC FIELD AT A POINT ALONG THE AXIAL LINE OF THE MAGNETIC DIPOLE (BAR MAGNET) $\vec{B}_{axial} = \frac{\mu_0}{4\pi} \frac{2}{r^3} \vec{p}_m$	p_m = magnetic dipole moment r =distance from the centre of the magnet to the point C. B =magnetic field	Magnetic field $B = \text{Tesla (T)}$
MAGNETIC FIELD AT A POINT ALONG THE EQUATORIAL LINE DUE TO A MAGNETIC DIPOLE (BAR MAGNET) $\vec{B}_{equatorial} = -\frac{\mu_0}{4\pi} \frac{\vec{p}_m}{r^3}$	p_m = magnetic dipole moment r =distance from the centre of the magnet to the point C. B =magnetic field	Magnetic field $B = \text{Tesla (T)}$

<p>TORQUE ON A BAR MAGNET IN UNIFORM MAGNETIC FIELD</p> $\tau = p_m B \sin \theta$	<p>Pm= magnetic dipole moment B=magnetic field</p>	<p>torque: newton metre Nm</p>
<p>POTENTIAL ENERGY IN BAR MAGNET</p> $U = -\vec{p}_m \cdot \vec{B}$	<p>U=potential energy Pm= magnetic dipole moment B=magnetic field</p>	<p>Joule (J)</p>
<p>MAGNETISING FIELD</p>	<p>\vec{H} = magnetising field</p>	<p>Am^{-1}</p>
<p>INTENSITY OF MAGNETIZATION</p> $\vec{M} = \frac{\text{Magnetic moment}}{\text{Volume}} = \frac{\vec{p}_m}{V}$	<p>M= intensity of magnetization Pm= magnetic dipole moment v=volume</p>	<p>Am^{-1}</p>
<p>MAGNETIC INDUCTION OR TOTAL MAGNETIC FIELD</p> $\vec{B} = \vec{B}_o + \vec{B}_m = \mu_o \vec{H} + \mu_o \vec{M}$ $\vec{B} = \vec{B}_o + \vec{B}_m = \mu_o (\vec{H} + \vec{M})$	<p>definition & explanation of the terms involved:- The magnetic induction (total magnetic field) inside the specimen B is equal to the sum of the magnetic field Bo produced in vacuum due to the magnetising field and the magnetic field Bm due to the induced magnetism of the substance.</p>	<p>tesla</p>
<p>MAGNETIC SUSCEPTIBILITY</p> $\chi_m = \frac{ \vec{M} }{ \vec{H} }$	<p>χ_M=magnetic susceptibility M= intensity of magnetization H=magnetising field</p>	<p>χ_m= no unit M = Am^{-1} H = Am^{-1}</p>
<p>CURIE'S LAW</p> $\chi_m \propto \frac{1}{T} \text{ or } \chi_m = \frac{C}{T}$	<p>C = Curie constant T=temperature χ_M=magnetic susceptibility</p>	<p>χ_m= no unit</p>
<p>CURIE-WEISS LAW</p> $\chi_m = \frac{C}{T - T_c}$	<p>χ_M=magnetic susceptibility C = Curie constant T_c= Curie temperature T=temperature</p>	<p>χ_m= no unit</p>
<p>BIOT-SAVART LAW</p> $d\vec{B} = \frac{\mu_o}{4\pi} \frac{I d\vec{l} \times \hat{r}}{r^2}$	<p>r=distance between the point P and dl dl =magnitude of the length element I=current; B=magnetic field</p>	<p>Magnetic field B = Tesla (T)</p>
<p>MAGNETIC FIELD DUE TO LONG STRAIGHT CONDUCTOR CARRYING CURRENT</p> $\vec{B} = \frac{\mu_o I}{2\pi a} \hat{n}$	<p>μ_o= absolute permeability of free space B=magnetic field I=current; a=dist. b/w straight conductor & the chosen point 'P'</p>	<p>Magnetic field B = Tesla (T)</p>

<p>MAGNETIC FIELD PRODUCED ALONG THE AXIS OF THE CURRENT-CARRYING CIRCULAR COIL</p> $\vec{B} = \frac{\mu_0 I}{2} \frac{R^2}{(R^2 + z^2)^{3/2}} \hat{k}$	 <p>μ_0= absolute permeability of free space B=magnetic field i=current r and z= refer from diagram</p>	<p>Magnetic field B = Tesla (T)</p>
<p>TANGENT LAW</p> $B_H = \frac{\mu_0 N I}{2R \tan \theta}$	<p>N=no of turns R=radius of the coil I=current $\tan \theta$=angle of deflection produced</p>	<p>Magnetic field B = Tesla (T)</p>
<p>MAGNETIC DIPOLE MOMENT IN CURRENT LOOP AS A MAGNETIC DIPOLE</p> $\vec{p}_m = I \vec{A}$	<p>pm =magnetic dipole moment A = area of the circular loop $A = \pi r^2$ I=current</p>	<p>Ampere per metre square Am^2</p>
<p>MAGNETIC DIPOLE MOMENT OF REVOLVING ELECTRON</p> $\mu_L = n \times 9.27 \times 10^{-24} A m^2$	<p>μ_L=Magnetic dipole moment n=principal quantum no. (no of the orbit)</p>	<p>Am^2</p>
<p>AMPÈRE'S CIRCUITAL LAW</p> $\oint_C \vec{B} \cdot d\vec{l} = \mu_0 I_{enclosed}$	<p>B=magnetic field μ_0= absolute permeability of free space dl=closed loop I=current in enclosed area</p>	<p>$N/A^2 = NA^{-2}$</p>
<p>MAGNETIC FIELD DUE TO THE CURRENT CARRYING WIRE OF INFINITE LENGTH USING AMPÈRE'S LAW</p> $\vec{B} = \frac{\mu_0 I}{2\pi r} \hat{n}$	<p>B=magnetic field μ_0= absolute permeability of free space I=current r= Radius of the Ampèrian loop</p>	<p>Magnetic field B = Tesla (T)</p>
<p>MAGNETIC FIELD DUE TO A LONG CURRENT CARRYING SOLENOID</p> $B = \mu_0 \frac{nLI}{L} = \mu_0 nI$	<p>B=Magnetic field n=no of turns per unit length=N/L L=length of the solenoid I=current</p>	<p>Magnetic field B = Tesla (T)</p>

<p>MAGNETIC FIELD IN TOROID OPEN SPACE INTERIOR TO THE TOROID</p> $\vec{B}_P = 0$ <p>OPEN SPACE EXTERIOR TO THE TOROID</p> $\vec{B}_Q = 0$ <p>INSIDE THE TOROID</p> $B_S = \mu_0 nI$	<p>μ_0= absolute permeability of free space</p> <p>n=no of turns per unit length</p> $n = \frac{N}{2\pi r_2}$ <p>N=total no of turns in the toroid</p>	<p>Magnetic field B = Tesla (T)</p>
<p>LORENTZ FORCE</p> $\vec{F} = q(\vec{v} \times \vec{B})$	<p>F=Lorentz force q=charge v=velocity of the charge in the magnetic field B B= magnetic field</p>	<p>newton</p>
<p>TESLA</p> $1 \text{ T} = \frac{1 \text{ N s}}{\text{C m}} = 1 \frac{\text{N}}{\text{A m}} = 1 \text{ N A}^{-1} \text{ m}^{-1}$	<p>The strength of the magnetic field is one tesla if a unit charge moving normal to the magnetic field with unit velocity experiences unit force.</p>	<p>$\text{N A}^{-1} \text{ m}^{-1}$</p>
<p>MOTION OF A CHARGED PARTICLE IN A UNIFORM MAGNETIC FIELD TIME PERIOD:</p> $T = \frac{2\pi m}{qB}$ <p>ANGULAR FREQUENCY</p> $\omega = 2\pi f = \frac{q}{m} B$	<p>m=mass q=charge B=Magnetic field T=Time period f=frequency w=angular frequency</p> <p>FREQUENCY:</p> $f = \frac{qB}{2\pi m}$	<p>time: seconds (s) frequency: hertz(Hz) Angular frequency radian per seconds(rad s^{-1})</p>
<p>MOTION OF A CHARGED PARTICLE UNDER CROSSED ELECTRIC AND MAGNETIC FIELD (VELOCITY SELECTOR)</p> $v_0 = \frac{E}{B}$	<p>v=velocity E=electric field B=magnetic field</p>	<p>ms^{-1}</p>

CLICK TO GET OUR FREE MATERIALS (2024-25):



<p>CYCLOTRON</p> $f_{\text{osc}} = \frac{qB}{2\pi m}$ $T = \frac{2\pi m}{qB}$ $KE = \frac{1}{2}mv^2 = \frac{q^2 B^2 r^2}{2m}$	<p>f=frequency T=Time period KE=kinetic energy q=charge B=magnetic field m=mass r=radius</p>	<p>time: seconds (s) frequency: hertz(Hz) KE= joule(J)</p>
<p>FORCE ON A CURRENT CARRYING CONDUCTOR PLACED IN A MAGNETIC FIELD</p> $\vec{F}_{\text{total}} = (I\vec{l} \times \vec{B})$ <p>In magnitude,</p> $F_{\text{total}} = BIl \sin \theta$	<p>I=current l=length of straight currnt carrying conductor B=magnetic field</p>	<p>newton (N)</p>
<p>FORCE BETWEEN TWO LONG PARALLEL CURRENT CARRYING CONDUCTORS</p> $d\vec{F} = (I_1 d\vec{l} \times \vec{B}_2) = I_1 dl \frac{\mu_0 I_2}{2\pi r} (\hat{k} \times \hat{i})$ $= \frac{\mu_0 I_1 I_2 dl}{2\pi r} \hat{j}$ $\frac{\vec{F}}{l} = \frac{\mu_0 I_1 I_2}{2\pi r} \hat{j}$	<p>I_1 and I_2 = electric currents passing through the conductors A and B in same direction r = conductors separated by a distance r μ_0= absolute permeability of free space</p>	<p>force = newton(N)</p>
<p>TORQUE ON A CURRENT LOOP PLACED IN A MAGNETIC FIELD</p> $\tau = NIAB \sin \theta$	<p>N=no of turns I=Current flowing in the loop A=Area B=magnetic field</p>	<p>torque: newton metre Nm</p>
<p>CURRENT IN A MOVING COIL GALVANOMETER</p> $I = G\theta$	<p>I=Current G=galvanometer constant ϑ=amount of twist</p> $G = \frac{K}{NAB}$	<p>current=a mpere (A)</p>

CLICK TO GET OUR FREE MATERIALS (2024-25):



<p>VOLTAGE SENSITIVITY</p> $V_s = \frac{\theta}{V}$ $V_s = \frac{\theta}{IR_g} = \frac{NAB}{KR_g}$ $V_s = \frac{1}{GR_g} = \frac{I_s}{R_g}$	<p>The deflection produced per unit voltage applied across galvanometer.</p>	<p>rad V⁻¹</p>
<p>GALVANOMETER TO AN AMMETER</p> $\frac{R_g S}{R_g + S} = R_a$	<p>R_a=resistance of ammeter R_g=galvanometer's resistance S=shunt resistance through the path</p>	<p>-----</p>
<p>In order to increase the range of an ammeter n times, the value of shunt resistance to be connected in parallel is</p> $S = \frac{R_g}{n-1}$		
<p>GALVANOMETER TO A VOLTMETER</p> $R_h = \frac{V}{I_g} - R_g$	<p>R_H=Resistance value connected in series with the galvanometer I_G=Current(galvanometer) R_g=galvanometer's resistance</p>	<p>-----</p>
<p>In order to increase the range of voltmeter n times the value of resistance to be connected in series with galvanometer is</p> $R_h = (n-1) R_g$		

With Regards,

SS PRITHVI, XII STD,

PRIT-EDUCATION.

CLICK TO GET OUR FREE MATERIALS (2024-25):

