

**Class: XII Session: 2022-23**  
**Computer Science (083)**  
**Sample Question Paper (Theory)**

**Maximum Marks: 70**

**Time Allowed: 3 hours**

**General Instructions:**

1. This question paper contains five sections, Section A to E.
2. All questions are compulsory.
3. Section A have 18 questions carrying 01 mark each.
4. Section B has 07 Very Short Answer type questions carrying 02 marks each.
5. Section C has 05 Short Answer type questions carrying 03 marks each.
6. Section D has 03 Long Answer type questions carrying 05 marks each.
7. Section E has 02 questions carrying 04 marks each. One internal choice is given in Q35 against part c only.
8. All programming questions are to be answered using Python Language only.

<b>SECTION A</b>		
1.	State True or False "Variable declaration is implicit in Python."	1
2.	Which of the following is an invalid datatype in Python? (a) Set (b) None (c) Integer (d) Real	1
3.	Given the following dictionaries  <pre>dict_exam={"Exam":"AISSCE", "Year":2023} dict_result={"Total":500, "Pass_Marks":165}</pre> Which statement will merge the contents of both dictionaries? a. dict_exam.update(dict_result) b. dict_exam + dict_result c. dict_exam.add(dict_result) d. dict_exam.merge(dict_result)	1
4.	Consider the given expression: <pre>not True and False or True</pre> Which of the following will be correct output if the given expression is evaluated?  (a) True (b) False (c) NONE (d) NULL	1
5.	Select the correct output of the code: <pre>a = "Year 2022 at All the best"</pre>	1

	<pre>a = a.split('2') b = a[0] + ". " + a[1] + ". " + a[3] print (b)</pre> <p>(a) Year . 0. at All the best  (b) Year 0. at All the best  (c) Year . 022. at All the best  (d) Year . 0. at all the best</p>	
6.	<p>Which of the following mode in file opening statement results or generates an error if the file does not exist?</p> <p>(a) a+ (b) r+ (c) w+ (d) None of the above</p>	1
7.	<p>Fill in the blank:</p> <p>_____ command is used to remove primary key from the table in SQL.</p> <p>(a) update (b) remove (c) alter (d) drop</p>	1
8.	<p>Which of the following commands will delete the table from MYSQL database?</p> <p>(a) DELETE TABLE  (b) DROP TABLE  (c) REMOVE TABLE  (d) ALTER TABLE</p>	1
9.	<p>Which of the following statement(s) would give an error after executing the following code?</p> <pre>S="Welcome to class XII" # Statement 1 print(S) # Statement 2 S="Thank you" # Statement 3 S[0]= '@' # Statement 4 S=S+"Thank you" # Statement 5</pre> <p>(a) Statement 3  (b) Statement 4  (c) Statement 5  (d) Statement 4 and 5</p>	1
10.	<p>Fill in the blank:</p> <p>_____ is a non-key attribute, whose values are derived from the primary key of some other table.</p> <p>(a) Primary Key  (b) Foreign Key  (c) Candidate Key</p>	1

	(d) Alternate Key	
11.	<p>The correct syntax of seek() is:</p> <p>(a) file_object.seek(offset [, reference_point])</p> <p>(b) seek(offset [, reference_point])</p> <p>(c) seek(offset, file_object)</p> <p>(d) seek.file_object(offset)</p>	1
12.	<p>Fill in the blank:</p> <p>The SELECT statement when combined with _____ clause, returns records without repetition.</p> <p>(a) DESCRIBE</p> <p>(b) UNIQUE</p> <p>(c) DISTINCT</p> <p>(d) NULL</p>	1
13.	<p>Fill in the blank:</p> <p>_____ is a communication methodology designed to deliver both voice and multimedia communications over Internet protocol.</p> <p>(a) VoIP                      (b) SMTP                      (c) PPP                      (d) HTTP</p>	1
14.	<p>What will the following expression be evaluated to in Python?</p> <pre>print(15.0 / 4 + (8 + 3.0))</pre> <p>(a) 14.75                      (b) 14.0                      (c) 15                      (d) 15.5</p>	1
15.	<p>Which function is used to display the total number of records from table in a database?</p> <p>(a) sum(*)</p> <p>(b) total(*)</p> <p>(c) count(*)</p> <p>(d) return(*)</p>	1
16.	<p>To establish a connection between Python and SQL database, connect() is used. Which of the following arguments may not necessarily be given while calling connect() ?</p> <p>(a) host</p> <p>(b) database</p> <p>(c) user</p> <p>(d) password</p>	1
<p>Q17 and 18 are ASSERTION AND REASONING based questions. Mark the correct choice as</p> <p>(a) Both A and R are true and R is the correct explanation for A</p>		

	(b) Both A and R are true and R is not the correct explanation for A (c) A is True but R is False (d) A is false but R is True	
17.	Assertion (A):- If the arguments in function call statement match the number and order of arguments as defined in the function definition, such arguments are called positional arguments. Reasoning (R):- During a function call, the argument list first contains default argument(s) followed by positional argument(s).	1
18.	Assertion (A): CSV (Comma Separated Values) is a file format for data storage which looks like a text file. Reason (R): The information is organized with one record on each line and each field is separated by comma.	1
<b>SECTION B</b>		
19.	Rao has written a code to input a number and check whether it is prime or not. His code is having errors. Rewrite the correct code and underline the corrections made.  <pre>def prime():     n=int(input("Enter number to check :: "))     for i in range (2, n//2):         if n%i=0:             print("Number is not prime \n")             break         else:             print("Number is prime \n')</pre>	2
20.	Write two points of difference between Circuit Switching and Packet Switching.  <p style="text-align: center;"><b>OR</b></p> <p>Write two points of difference between XML and HTML.</p>	2
21.	(a) Given is a Python string declaration: <code>myexam="@@CBSE Examination 2022@@"</code>  Write the output of: <code>print(myexam[::-2])</code>  (b) Write the output of the code given below: <code>my_dict = {"name": "Aman", "age": 26}</code> <code>my_dict['age'] = 27</code> <code>my_dict['address'] = "Delhi"</code> <code>print(my_dict.items())</code>	1  1
22.	Explain the use of 'Foreign Key' in a Relational Database Management System. Give example to support your answer.	2

23.	<p>(a) Write the full forms of the following:          (i) SMTP    (ii) PPP</p> <p>(b) What is the use of TELNET?</p>	2												
24.	<p>Predict the output of the Python code given below:</p> <pre>def Diff(N1,N2):     if N1&gt;N2:         return N1-N2     else:         return N2-N1</pre> <p>NUM= [10,23,14,54,32]          for CNT in range (4,0,-1):          A=NUM[CNT]          B=NUM[CNT-1]          print(Diff(A,B),'#', end=' ')</p> <p style="text-align: center;">OR</p> <p>Predict the output of the Python code given below:</p> <pre>tuple1 = (11, 22, 33, 44, 55 ,66) list1 =list(tuple1) new_list = [] for i in list1:     if i%2==0:         new_list.append(i) new_tuple = tuple(new_list) print(new_tuple)</pre>	2												
25.	<p>Differentiate between count() and count(*) functions in SQL with appropriate example.</p> <p style="text-align: center;">OR</p> <p>Categorize the following commands as DDL or DML:          INSERT, UPDATE, ALTER, DROP</p>	2												
<b>SECTION C</b>														
26.	<p>(a) Consider the following tables - Bank_Account and Branch:</p> <p>Table: Bank_Account</p> <table border="1" data-bbox="268 1908 783 2047"> <thead> <tr> <th>ACode</th> <th>Name</th> <th>Type</th> </tr> </thead> <tbody> <tr> <td>A01</td> <td>Amrita</td> <td>Savings</td> </tr> <tr> <td>A02</td> <td>Parthodas</td> <td>Current</td> </tr> <tr> <td>A03</td> <td>Miraben</td> <td>Current</td> </tr> </tbody> </table>	ACode	Name	Type	A01	Amrita	Savings	A02	Parthodas	Current	A03	Miraben	Current	1+2
ACode	Name	Type												
A01	Amrita	Savings												
A02	Parthodas	Current												
A03	Miraben	Current												

Table: Branch

ACode	City
A01	Delhi
A02	Mumbai
A01	Nagpur

What will be the output of the following statement?

```
SELECT * FROM Bank_Account NATURAL JOIN Branch;
```

(b) Write the output of the queries (i) to (iv) based on the table, TECH\_COURSE given below:

Table: TECH\_COURSE

CID	CNAME	FEES	STARTDATE	TID
C201	Animation and VFX	12000	2022-07-02	101
C202	CADD	15000	2021-11-15	NULL
C203	DCA	10000	2020-10-01	102
C204	DDTP	9000	2021-09-15	104
C205	Mobile Application Development	18000	2022-11-01	101
C206	Digital marketing	16000	2022-07-25	103

- (i) SELECT DISTINCT TID FROM TECH\_COURSE;
- (ii) SELECT TID, COUNT(\*), MIN(FEES) FROM TECH\_COURSE GROUP BY TID HAVING COUNT(TID)>1;
- (iii) SELECT CNAME FROM TECH\_COURSE WHERE FEES>15000 ORDER BY CNAME;
- (iv) SELECT AVG(FEES) FROM TECH\_COURSE WHERE FEES BETWEEN 15000 AND 17000;

27. Write a method COUNTLINES() in Python to read lines from text file 'TESTFILE.TXT' and display the lines which are not starting with any vowel.

Example:

If the file content is as follows:

An apple a day keeps the doctor away.  
We all pray for everyone's safety.  
A marked difference will come in our country.

The COUNTLINES() function should display the output as:

3

The number of lines not starting with any vowel - 1

OR

Write a function ETCOUNT() in Python, which should read each character of a text file "TESTFILE.TXT" and then count and display the count of occurrence of alphabets E and T individually (including small cases e and t too).

Example:

If the file content is as follows:

Today is a pleasant day.  
It might rain today.  
It is mentioned on weather sites

The ETCOUNT() function should display the output as:

E or e: 6  
T or t : 9

28. (a) Write the outputs of the SQL queries (i) to (iv) based on the relations Teacher and Placement given below:

3

Table : Teacher

T_ID	Name	Age	Department	Date_of_join	Salary	Gender
1	Arunan	34	Computer Sc	2019-01-10	12000	M
2	Saman	31	History	2017-03-24	20000	F
3	Randeep	32	Mathematics	2020-12-12	30000	M
4	Samira	35	History	2018-07-01	40000	F
5	Raman	42	Mathematics	2021-09-05	25000	M
6	Shyam	50	History	2019-06-27	30000	M
7	Shiv	44	Computer Sc	2019-02-25	21000	M
8	Shalakra	33	Mathematics	2018-07-31	20000	F

Table : Placement

P_ID	Department	Place
1	History	Ahmedabad
2	Mathematics	Jaipur
3	Computer Sc	Nagpur

- (i) `SELECT Department, avg(salary) FROM Teacher GROUP BY Department;`  
ii) `SELECT MAX(Date_of_Join),MIN(Date_of_Join) FROM Teacher;`  
ii) `SELECT Name, Salary, T.Department, Place FROM Teacher T, Placement P WHERE T.Department = P.Department AND Salary>20000;`  
iv) `SELECT Name, Place FROM Teacher T, Placement P`

	<p>WHERE Gender ='F' AND T.Department=P.Department;</p> <p>(b) Write the command to view all tables in a database.</p>	
29.	<p>Write a function INDEX_LIST(L), where L is the list of elements passed as argument to the function. The function returns another list named 'indexList' that stores the indices of all Non-Zero Elements of L.</p> <p>For example:</p> <p>If L contains [12,4,0,11,0,56]</p> <p>The indexList will have - [0,1,3,5]</p>	3
30.	<p>A list contains following record of a customer: [Customer_name, Phone_number, City]</p> <p>Write the following user defined functions to perform given operations on the stack named 'status':</p> <p>(i) Push_element() - To Push an object containing name and Phone number of customers who live in Goa to the stack</p> <p>(ii) Pop_element() - To Pop the objects from the stack and display them. Also, display "Stack Empty" when there are no elements in the stack.</p> <p>For example: If the lists of customer details are:</p> <p>["Gurdas", "9999999999", "Goa"] ["Julee", "8888888888", "Mumbai"] ["Murugan", "7777777777", "Cochin"] ["Ashmit", "1010101010", "Goa"]</p> <p>The stack should contain ["Ashmit", "1010101010"] ["Gurdas", "9999999999"]</p> <p>The output should be: ["Ashmit", "1010101010"] ["Gurdas", "9999999999"] Stack Empty</p> <p style="text-align: center;"><b>OR</b></p> <p>Write a function in Python, Push(SItem) where , SItem is a dictionary containing the details of stationary items- {Sname:price}. The function should push the names of those items in the stack who have price greater than 75. Also display the count of elements pushed into the stack.</p> <p>For example: If the dictionary contains the following data:</p>	3




Ditem={"Pen":106,"Pencil":59,"Notebook":80,"Eraser":25}

The stack should contain  
 Notebook  
 Pen

The output should be:  
 The count of elements in the stack is 2

**SECTION D**

31. MakeInIndia Corporation, an Uttarakhand based IT training company, is planning to set up training centres in various cities in next 2 years. Their first campus is coming up in Kashipur district. At Kashipur campus, they are planning to have 3 different blocks for App development, Web designing and Movie editing. Each block has number of computers, which are required to be connected in a network for communication, data and resource sharing. As a network consultant of this company, you have to suggest the best network related solutions for them for issues/problems raised in question nos. (i) to (v), keeping in mind the distances between various blocks/locations and other given parameters.

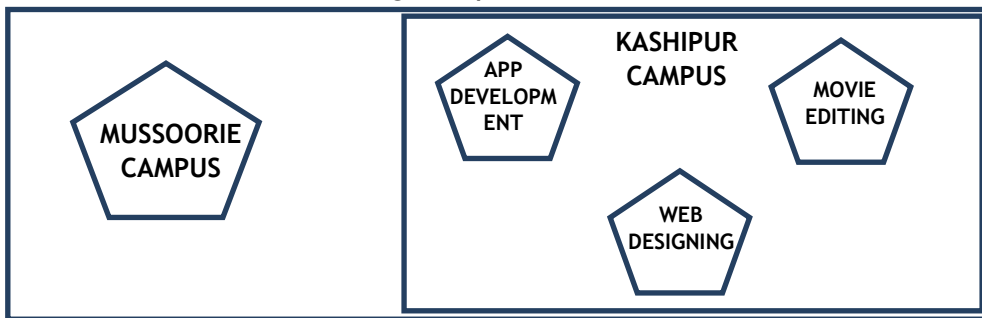

Distance between various blocks/locations:

Block	Distance
App development to Web designing	28 m
App development to Movie editing	55 m
Web designing to Movie editing	32 m
Kashipur Campus to Mussoorie Campus	232 km

Number of computers

Block	Number of Computers
App development	75
Web designing	50
Movie editing	80

- (i) Suggest the most appropriate block/location to house the SERVER in the Kashipur campus (out of the 3 blocks) to get the best and effective connectivity. Justify your answer. 1
- (ii) Suggest a device/software to be installed in the Kashipur Campus to take care of data security. 1
- (iii) Suggest the best wired medium and draw the cable layout (Block 1

	<p>to Block) to economically connect various blocks within the Kashipur Campus.</p> <p>(iv) Suggest the placement of the following devices with appropriate reasons:</p> <ol style="list-style-type: none"> <li>a. Switch / Hub</li> <li>b. Repeater</li> </ol> <p>(v) Suggest a protocol that shall be needed to provide Video Conferencing solution between Kashipur Campus and Mussoorie Campus.</p>	<p>1</p> <p>1</p>
32.	<p>(a) Write the output of the code given below:</p> <pre> p=5 def sum(q, r=2) :     global p     p=r+q**2     print(p, end= '#')  a=10 b=5 sum(a, b) sum(r=5, q=1) </pre> <p>(b) The code given below inserts the following record in the table Student:</p> <p style="padding-left: 40px;">RollNo - integer Name - string Clas - integer Marks - integer</p> <p>Note the following to establish connectivity between Python and MYSQL:</p> <ul style="list-style-type: none"> <li>• Username is root</li> <li>• Password is tiger</li> <li>• The table exists in a MYSQL database named school.</li> <li>• The details (RollNo, Name, Clas and Marks) are to be accepted from the user.</li> </ul> <p>Write the following missing statements to complete the code: Statement 1 - to form the cursor object Statement 2 - to execute the command that inserts the record in the table Student. Statement 3- to add the record permanently in the database</p> <pre> import mysql.connector as mysql def sql_data() :     con1=mysql.connect(host="localhost", user="root", </pre>	2+3

```

password="tiger", database="school")
    mycursor=_____ #Statement 1
    rno=int(input("Enter Roll Number :: "))
    name=input("Enter name :: ")
    clas=int(input("Enter class :: "))
    marks=int(input("Enter Marks :: "))
    query="insert into student
values ({},'{}',{},{})".format(rno,name,clas,marks)
    _____ #Statement 2
    _____ # Statement 3
print("Data Added successfully")

```

OR

(a) Predict the output of the code given below:

```

s="welcome2cs"
n = len(s)
m=""
for i in range(0, n):
    if (s[i] >= 'a' and s[i] <= 'm'):
        m = m +s[i].upper()
    elif (s[i] >= 'n' and s[i] <= 'z'):
        m = m +s[i-1]
    elif (s[i].isupper()):
        m = m + s[i].lower()
    else:
        m = m + '&'
print(m)

```

(b) The code given below reads the following record from the table named `student` and displays only those records who have marks greater than 75:

**RollNo - integer**  
**Name - string**  
**Clas - integer**  
**Marks - integer**

Note the following to establish connectivity between Python and MYSQL:

- Username is root
- Password is tiger
- The table exists in a MYSQL database named `school`.

Write the following missing statements to complete the code:

Statement 1 - to form the cursor object

Statement 2 - to execute the query that extracts records of those students whose marks are greater than 75.

Statement 3- to read the complete result of the query (records whose

```
marks are greater than 75) into the object named data, from the
table student in the database.

import mysql.connector as mysql
def sql_data():

    con1=mysql.connect(host="localhost",user="root",
        password="tiger", database="school")
    mycursor=_____ #Statement 1
    print("Students with marks greater than 75 are :
    ")
    _____ #Statement 2
    data=_____ #Statement 3
    for i in data:
        print(i)
    print()
```

33. What is the advantage of using a csv file for permanent storage?  
 Write a Program in Python that defines and calls the following user defined functions:

(i) ADD() - To accept and add data of an employee to a CSV file 'record.csv'. Each record consists of a list with field elements as empid, name and mobile to store employee id, employee name and employee salary respectively.

(ii) COUNTR() - To count the number of records present in the CSV file named 'record.csv'.

OR

Give any one point of difference between a binary file and a csv file.  
 Write a Program in Python that defines and calls the following user defined functions:

(i) add() - To accept and add data of an employee to a CSV file 'furdata.csv'. Each record consists of a list with field elements as fid, fname and fprice to store furniture id, furniture name and furniture price respectively.

(ii) search()- To display the records of the furniture whose price is more than 10000.

**SECTION E**

34. Navdeep creates a table RESULT with a set of records to maintain the marks secured by students in Sem 1, Sem2, Sem3 and their division. After creation of the table, he has entered data of 7 students in the table.

ROLL_NO	SNAME	SEM1	SEM2	SEM3	DIVISION
101	KARAN	366	410	402	I
102	NAMAN	300	350	325	I

103	ISHA	400	410	415	I
104	RENU	350	357	415	I
105	ARPIT	100	75	178	IV
106	SABINA	100	205	217	II
107	NEELAM	470	450	471	I

Based on the data given above answer the following questions:

- (i) Identify the most appropriate column, which can be considered as Primary key.
- (ii) If two columns are added and 2 rows are deleted from the table result, what will be the new degree and cardinality of the above table?
- (iii) Write the statements to:
  - a. Insert the following record into the table  
Roll No- 108, Name- Aadit, Sem1- 470, Sem2-444, Sem3- 475, Div - I.
  - b. Increase the SEM2 marks of the students by 3% whose name begins with 'N'.

OR (Option for part iii only)

- (iii) Write the statements to:
  - a. Delete the record of students securing IV division.
  - b. Add a column REMARKS in the table with datatype as `varchar` with 50 characters

35. Aman is a Python programmer. He has written a code and created a binary file `record.dat` with `employeeid`, `ename` and `salary`. The file contains 10 records. He now has to update a record based on the employee id entered by the user and update the salary. The updated record is then to be written in the file `temp.dat`. The records which are not to be updated also have to be written to the file `temp.dat`. If the employee id is not found, an appropriate message should to be displayed. As a Python expert, help him to complete the following code based on the requirement given above:

```
import _____ #Statement 1
def update_data():
    rec={}
    fin=open("record.dat","rb")
    fout=open("_____") #Statement 2
    found=False
    eid=int(input("Enter employee id to update their
```

	<pre> salary :: ") while True:     try:         rec=_____ #Statement 3         if rec["Employee id"]==eid:             found=True             rec["Salary"]=int(input("Enter new salary :: "))             pickle._____ #Statement 4         else:             pickle.dump(rec,fout)     except:         break if found==True:     print("The salary of employee id ",eid," has been updated.") else:     print("No employee with such id is not found") fin.close() fout.close() </pre>	
(i)	Which module should be imported in the program? (Statement 1)	1
(ii)	Write the correct statement required to open a temporary file named temp.dat. (Statement 2)	1
(iii)	Which statement should Aman fill in Statement 3 to read the data from the binary file, record.dat and in Statement 4 to write the updated data in the file, temp.dat?	2